


VIBAC GROUP



DRY FRUITS

Moving to monomaterial RECYCLABLE structure

CURRENT STRUCTURE

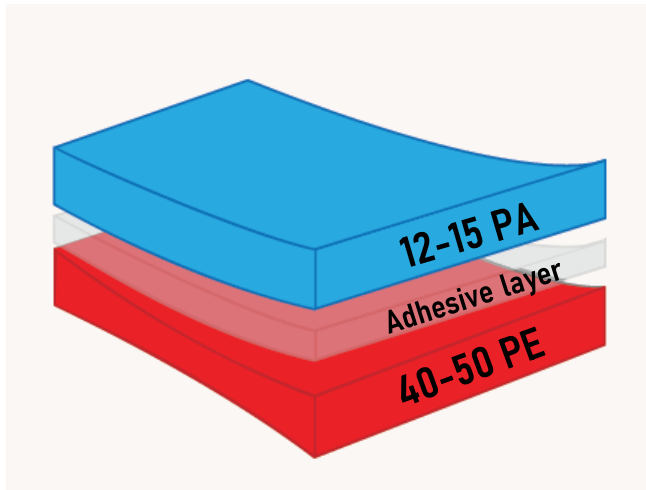


Weight: 200g

Properties	
OTR 23°C- 0% R.H.	WTR 37,8°C-90%R.H.
15 - 30	8 - 12

* 7 OTHER: All other plastic materials


ALTERNATIVE STRUCTURE

LAP SEAL (X1HB.C)




Inside seals to outside

FIN SEAL (REHB.C)



Inside seals to inside

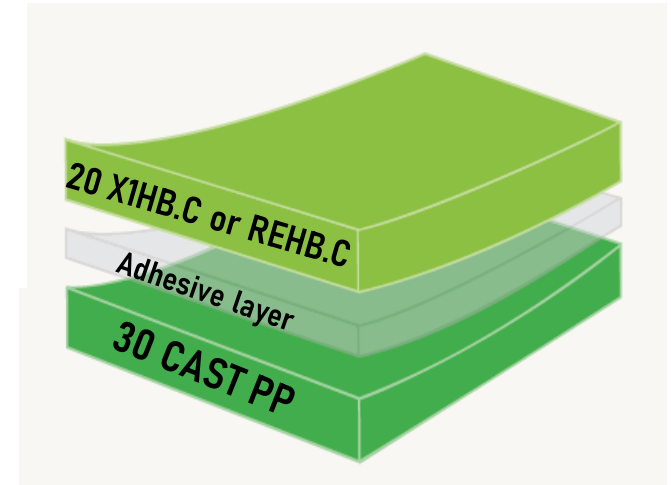


Properties	
OTR 23°C- 0% R.H.	WTR 37,8°C-90%R.H.
1	5

*5 PP: Polypropylene

<5% heterogeneous material (Directive 94/62/EC compliant – Decision EU 2019/665)

Moving to monomaterial RECYCLABLE structure

CURRENT STRUCTURE

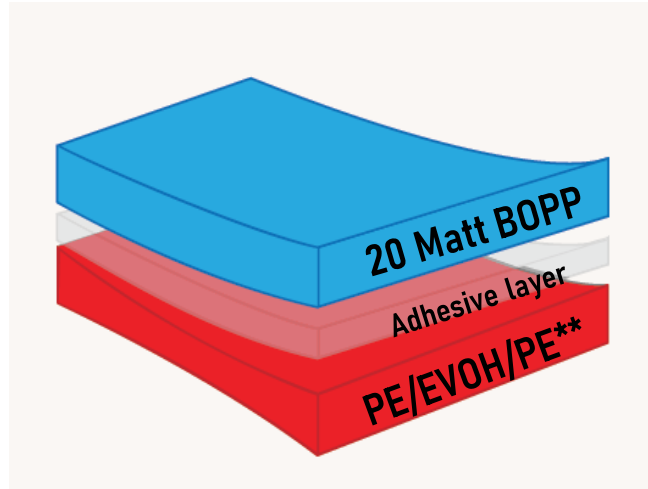


** Total thickness: 40 µm
EVOH thickness: 3 µm
Weight: 150g

Properties	
OTR 23°C- 0% R.H.	WTR 37,8°C-90%R.H.
<1,4	<6

*7 OTHER: All other plastic materials

ALTERNATIVE STRUCTURE

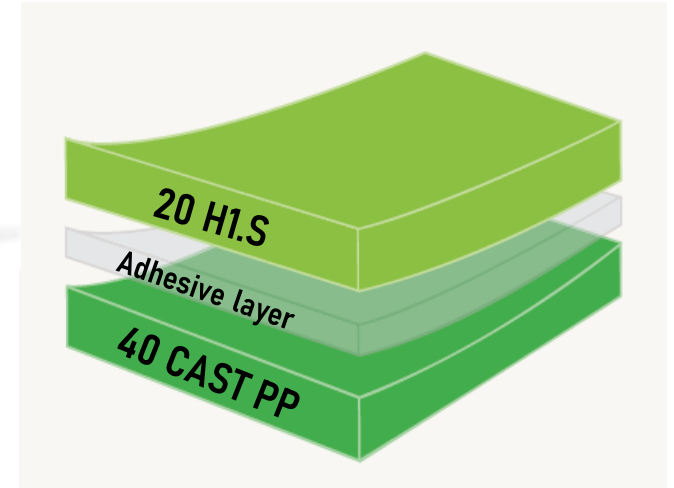

Properties	
OTR 23°C- 0% R.H.	WTR 37,8°C-90%R.H.
1	5


*5 PP: Polypropylene

<5% heterogeneous material (Directive 94/62/EC compliant – Decision EU 2019/665)


Moving to monomaterial RECYCLABLE structure



CURRENT STRUCTURE

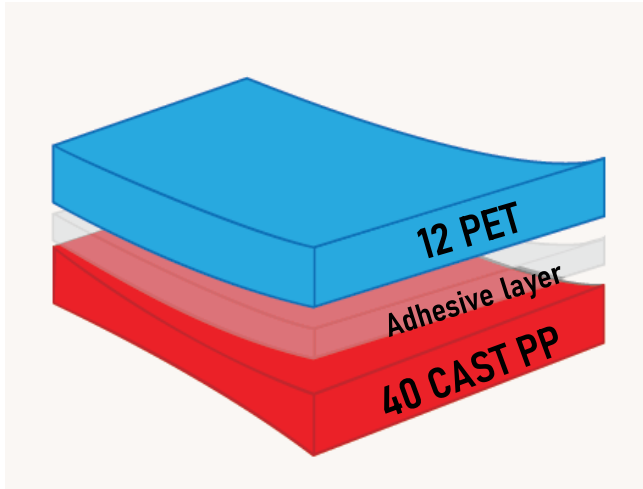

ALTERNATIVE STRUCTURE

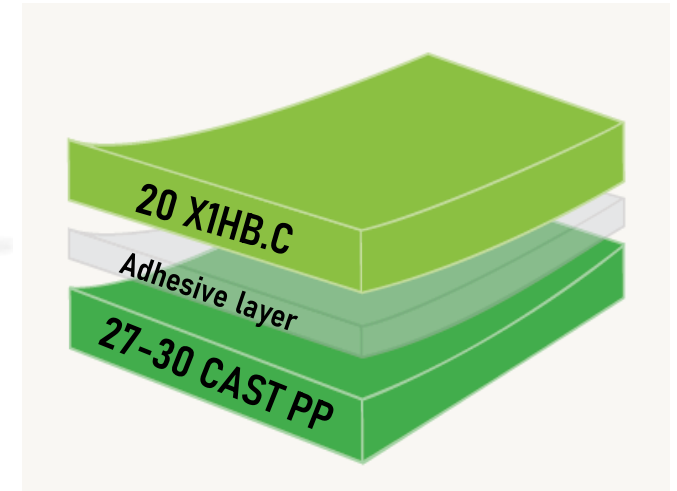

Weight: 400g

Properties	
OTR 23°C- 0% R.H.	WTR 37,8°C-90%R.H.
13	8-12

* 7 OTHER: All other plastic materials

Properties	
OTR 23°C- 0% R.H.	WTR 37,8°C-90%R.H.
1	5


*5 PP: Polypropylene

<5% heterogeneous material (Directive 94/62/EC compliant – Decision EU 2019/665)

Moving to monomaterial RECYCLABLE structure



CURRENT STRUCTURE

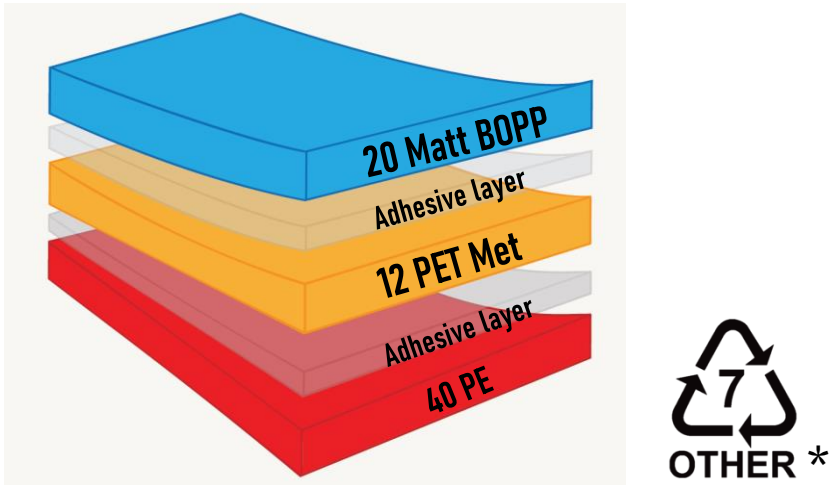


Weight: 60g

Properties	
OTR 23°C- 0% R.H.	WTR 37,8°C-90%R.H.
<1	<1

* 7 OTHER: All other plastic materials



ALTERNATIVE STRUCTURE

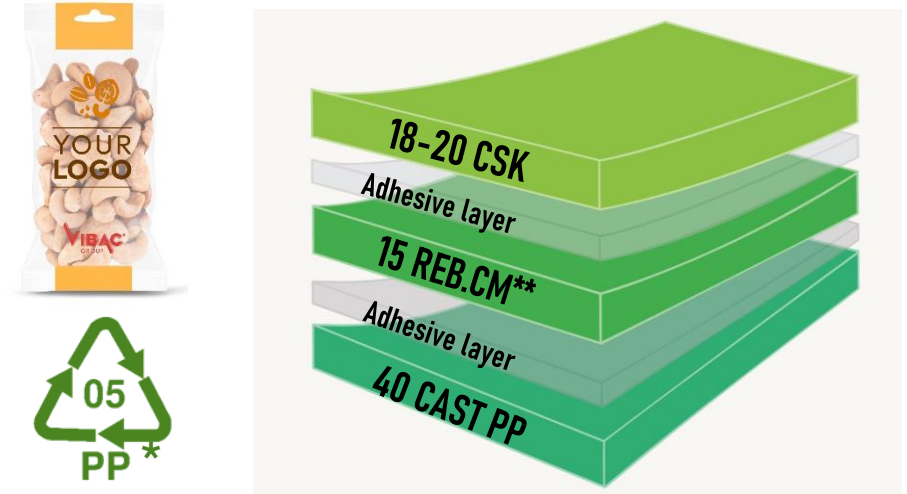

<5% heterogeneous material (Directive 94/62/EC compliant – Decision EU 2019/665)

Properties	
OTR 23°C- 0% R.H.	WTR 37,8°C-90%R.H.
0,1	0,15


*5 PP: Polypropylene

** Available one side treated version: REB1.CM

Moving to monomaterial RECYCLABLE structure




CURRENT STRUCTURE

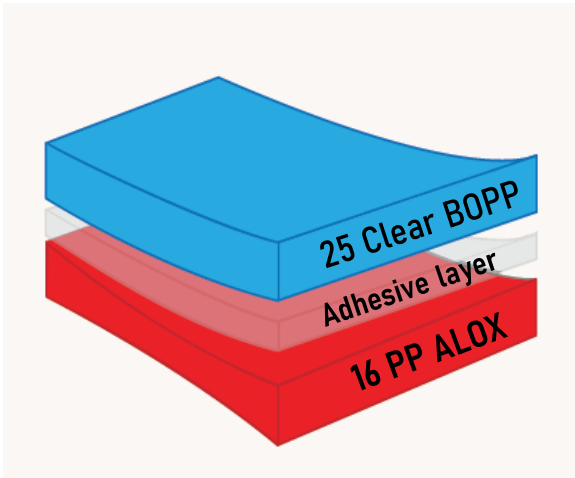

Properties	
OTR 23°C- 0% R.H.	WTR 37,8°C-90%R.H.
<1	<1



ALTERNATIVE STRUCTURE

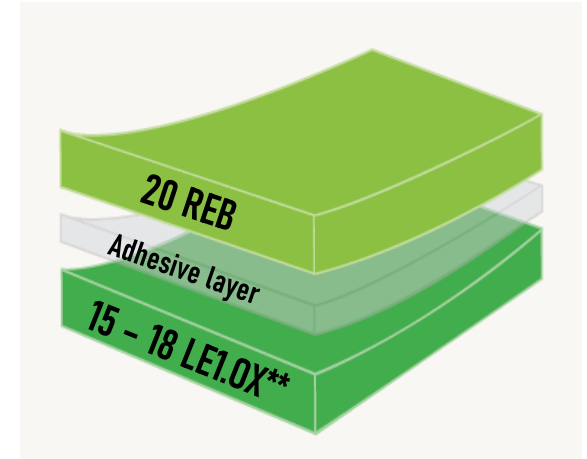

<5% heterogeneous material (Directive 94/62/EC compliant – Decision EU 2019/665)

Properties	
OTR 23°C- 0% R.H.	WTR 37,8°C-90%R.H.
0,1	0,7

**Available two side treated version alox film: LE.OX



Thank you for your attention